

HF-MP-RW-CF

13.56Mhz multi protocol RFID reader/writer with CF interface

Specifications

- Compact Flash CF Type II Interface
- Support ISO14443A, ISO1443B & ISO15693 Protocols
- Pocket PC 2003/2005 Operating Systems Compatibility
- Frequency: 13.56Mhz
- Reading Range: 3-5 cm for ISO card
- 120mA Working Current
- Operating Temperature Range: -20°C ~ +50°C
- Dimension: 83 × 44 × 13 mm
- Weight : 20g




Installation :

[1] **Pocket PC OS** : Run the setup from the path : \demo software\PocketPC_Setup\Setup
It will install the “RFIDReader” program and DLL onto PDA, and then become a logo as follow



[2] Plug the reader module to the PDA through the CF slot

[3] run the “RFIDReader” program , Click “Connect” button on the windows of “Device”, the software will search for the port and show corresponding module information after successful connecting.

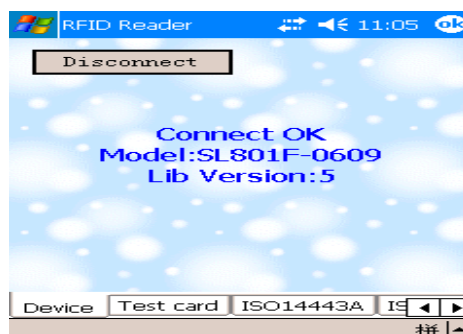

[4] Refer to the user manual for read/write operation in detail .

path : \HF-MP-RW-CF-User Manual.pdf